




久大軸承有限公司  
JOTA BEARING CO., LTD.

微型軸承

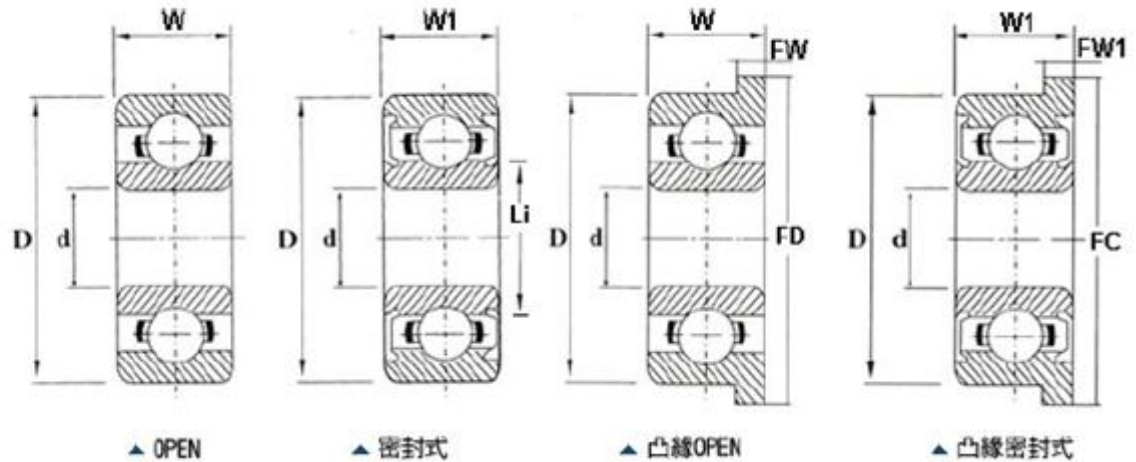

| 主要寸法 |   |     |     |     |     |     | 型號   |             | 凸緣型號      |             |
|------|---|-----|-----|-----|-----|-----|------|-------------|-----------|-------------|
| d    | D | W   | W1  | FD  | FW  | FW1 | JIS  | NMB         | OPEN      | Shielded    |
| 1    | 3 | 1   | -   | 3.8 | 0.3 |     | 681  |             | LF-310    |             |
|      | 3 | 1.5 | -   |     |     |     | -    |             |           |             |
|      | 4 | 1.6 | -   |     |     |     | 691  |             |           |             |
| 1.2  | 4 | 1.8 | -   | 4.8 | 0.4 |     | -    |             | RF-412    |             |
| 1.5  | 4 | 1.2 | 2   | 5   | 0.4 | 0.6 | 681X | L-415zz     | LF-415    | LF-415zz    |
|      | 4 | 1.8 | 2.5 |     |     |     | -    | L-415zzw52  |           |             |
|      | 5 | 2   | 2.6 | 6.5 | 0.6 | 0.8 | 691X | R-515zz     | RF-515    | RF-515zz    |
|      | 6 | 2.5 | 3   | 7.5 | 0.6 | 0.8 | 601X | R-615zz     | RF-615    | RF-615zz    |
| 2    | 5 | 1.5 | 2.3 | 6.1 | 0.5 | 0.6 | 682  | L-520zz     | LF-520    | LF-520zz    |
|      | 5 | 2   | 2.5 |     |     |     | -    | L-520zzw52  |           |             |
|      | 5 | 2.5 | -   |     |     |     | -    |             |           |             |
|      | 6 | 2.3 | 3   | 7.5 | 0.6 | 0.8 | 692  | R-620zz     | RF-620    | RF-620zz    |
|      | 6 | 2.5 | 2.5 | 7.2 | 0.6 | 0.6 | -    | R-620zzy52  | RF-620w52 | RF-620zzy52 |
|      | 6 | 2.5 | 2.3 |     |     |     | -    | R-620xzzy32 |           |             |
|      | 7 | 2.8 | 3.5 | 8.5 | 0.7 | 0.9 | 602  | R-720zz     | RF-720    | RF-720zz    |
|      | 7 | 2.5 | 3   | 8.2 | 0.6 | 0.6 | -    | R-720zzy03  | RF-720y52 | RF-720zzy03 |

Tel: 886-3-3250202 Fax:886-3-3259933 Email: [jota@jota-bearing.com.tw](mailto:jota@jota-bearing.com.tw)

Add: 桃園市春日路 1434 巷 65 號 / No.65, Ln. 1434, Chunri Rd., Taoyuan City, Taoyuan County 330, Taiwan (R.O.C.)



久大軸承有限公司  
JOTA BEARING CO., LTD.

| 主要寸法 |    |     |      |      |     |     | 型號       |            | 凸緣型號      |             |
|------|----|-----|------|------|-----|-----|----------|------------|-----------|-------------|
| d    | D  | W   | W1   | FD   | FW  | FW1 | JIS      | NMB        | OPEN      | Shielded    |
| 2.5  | 6  | 1.8 | 2.6  | 7.1  | 0.5 | 0.8 | 682X     | L-625zz    | LF-625    | LF-625zz    |
|      | 7  | 2.5 | 3.5  | 8.5  | 0.7 | 0.7 | 692X     | R-725zz    | RF-725    | RF-725zz    |
|      | 7  | -   | 3    | 8.2  |     | 0.6 | -        | R-725zzy03 |           | RF-725zzy03 |
|      | 8  | 2.8 | 4    | 9.5  | 0.7 | 0.9 | 602X     | R-825zz    | RF-825    | RF-825zz    |
|      | 8  | 2.5 | 2.8  | 9.2  | 0.6 | -   | -        | R-825zzy82 | RF-825y52 |             |
| 3    | 6  | 2   | 2.5  | 7.2  | 0.6 | 0.6 | 673      | L-630zz    | LF-630    | LF-630zz    |
|      | 7  | 2   | 3    | 8.1  | 0.5 | 0.8 | 683      | L-730zz    | LF-730    | LF-730zz    |
|      | 8  | 3   | 4    | 9.5  | 0.7 | 0.9 | 693      | R-830zz    | RF-830    | RF-830zz    |
|      | 8  | 2.5 | 3    | 9.2  | 0.6 | -   | -        | R-830zzy03 | RF-830y52 |             |
|      | 8  | -   | 3.5  |      |     |     |          | R-830zzy53 |           |             |
|      | 9  | 3   | 5    | 10.5 | 0.7 | 1.0 | 603      | R-930zz    | RF-930    | RF-930zz    |
|      | 9  | 2.5 | 4    | 10.2 | 0.6 |     |          | R-930zzy04 | RF-930y52 |             |
|      | 9  | -   | 4    | 10.6 |     | 0.8 | -        | -          | -         | RF-930zzy04 |
|      | 10 | 4   | 4    | 11.5 | 1.0 | 1.0 | 623      | R-1030zz   | RF-1030   | RF-1030zz   |
|      | 10 | 3.5 | -    |      |     |     | -        | -          | -         | -           |
| 4    | 7  | 2   | 2.5  | 8.2  | 0.6 | 0.6 | 674      | L-740zz    | LF-740    | LF-740zz    |
|      | 8  | 2   | 3    | 9.2  | 0.6 | 0.6 | -        | L-840zz    | LF-840    | LF-840zz    |
|      | 9  | 2.5 | 4    | 10.3 | 0.6 | 0.6 | 684      | L-940zz    | LF-940    | LF-940zz    |
|      | 10 | 3   | 4    | 11.2 | 0.6 | -   | -        | L-1040zz   | LF-1040   | -           |
|      | 10 | -   | 4    | 11.6 | -   | 0.8 | -        | -          | -         | LF-1040zz   |
|      | 11 | 4   | 4    | 12.5 | 1.0 | 1.0 | 694      | R-1140zz   | RF-1140   | RF-1040zz   |
|      | 11 | 3.5 | -    |      |     |     | -        | -          |           |             |
|      | 12 | 4   | 4    | 13.5 | 1.0 | 1.0 | 604      | R-1240zz   | RF-1240   | RF-1240zz   |
|      | 13 | 5   | 5    | 15.0 | 1.0 | 1.0 | 624      | R-1340zz   | RF-1340   | RF-1340zz   |
| 16   | 5  | 5   | 18.0 | 1.0  | 1.0 | 634 | R-1640zz | RF-1640    | RF-1640zz |             |

Tel: 886-3-3250202 Fax:886-3-3259933 Email: [jota@jota-bearing.com.tw](mailto:jota@jota-bearing.com.tw)

Add: 桃園市春日路 1434 巷 65 號 / No.65, Ln. 1434, Chunri Rd., Taoyuan City, Taoyuan County 330, Taiwan (R.O.C.)



久大軸承有限公司  
JOTA BEARING CO., LTD.

| 主要寸法 |    |     |     |      |      |     | 型號       |             | 凸緣型號      |              |
|------|----|-----|-----|------|------|-----|----------|-------------|-----------|--------------|
| d    | D  | W   | W1  | FD   | FW   | FW1 | JIS      | NMB         | OPEN      | Shielded     |
| 5    | 8  | 2   | 2.5 | 9.2  | 0.6  | 0.6 | 675      | L-850zz     | LF-850    | LF-850zz     |
|      | 8  | 2.8 | -   |      |      |     |          |             | -         | -            |
|      | 9  | 2.5 | 3   | 10.2 | 0.6  | 0.6 | -        | L-950zz     | LF-950    | LF-950zz     |
|      | 10 | 3   | 4   | 11.2 | 0.6  |     | L-1050   | L-1050zz    | LF-1050   |              |
|      | 10 |     | 4   | 11.6 |      | 0.8 | -        | -           | -         | LF-1050zz    |
|      | 11 | 3   | 5   | 12.5 | 0.8  | 1.0 | 685      | L-1150zz    | -         | LF-1150zz    |
|      | 11 | -   | 4   | 12.6 | -    | 0.8 | -        | L-1150zzy04 |           | LF-1150zzy04 |
|      | 13 | 4   | 4   | 15.0 | 1.0  | 1.0 | 695      | R-1350zz    | RF-1350   | RF-1350zz    |
|      | 13 | -   | 5   | 15.0 | 1.0  | 1.0 | -        | R-1350zzw05 | -         | RF-1350zzw05 |
|      | 14 | 5   | 5   | 16.0 | 1.0  | 1.0 | 605      | R-1450zz    | RF-1450   | RF-1450zz    |
|      | 16 | 5   | 5   | 18.0 | 1.0  | 1.0 | 625      | R-1650zz    | RF-1650   | RF-1650zz    |
|      | 19 | 6   | 6   | 22.0 | 1.5  | 1.5 | 635      | R-1950zz    | RF-1950   | RF-1950zz    |
|      | 6  | 10  | 2.5 | 3    | 11.2 | 0.6 | 0.6      | 676         | L-1060zz  | LF-1060      |
| 12   |    | 3   | 4   | 13.2 | 0.6  | -   | -        | L-1260zz    | LF-1260   |              |
| 12   |    | -   | 4   | 13.6 | -    | 0.8 | -        |             |           | LF-1260zz    |
| 13   |    | 3.5 | 5   | 15.0 | 1.0  | 1.1 | 686      | L-1360zz    | LF-1360   | LF-1360zz    |
| 13   |    | -   | 4.5 |      |      |     |          | L-1360zzy54 |           |              |
| 15   |    | 5   | 6   | 17.0 | 1.2  | 1.2 | 696      | R-1560zz    | RF-1560   | RF-1560zz    |
| 17   |    | 6   | 6   | 19.0 | 1.2  | 1.2 | 606      | R-1760zz    | RF-1760   | RF-1760zz    |
| 19   |    | 6   | 6   | 22.0 | 1.5  | 1.5 | 626      | R-1960zz    |           | RF-1960zz    |
| 7    | 22 | 7   | 7   |      |      |     | 636      | R-2260zz    |           | RF-2260zz    |
|      | 11 | 2.5 | 3   | 12.2 | 0.6  | 0.6 | 677      | L-1170zz    | LF-1170   | LF-1170zz    |
|      | 13 | 3   | 4   | 14.2 | 0.6  | -   | -        | L-1370zz    | LF-1370   |              |
|      | 13 | -   | 4   | 14.6 | -    | 0.8 | -        |             |           | LF-1370zz    |
|      | 14 | 3.5 | 5   | 16.0 | 1.0  | 1.1 | 687      | L-1470zz    | LF-1470   | LF-1470zz    |
|      | 17 | 5   | 5   | 19   | 1.2  | 1.2 | 697      | L-1770zz    |           | LF-1770zz    |
|      | 19 | 6   | 6   | 22   | 1.5  | 1.5 | 607      | R-1970zz    | RF-1970   | RF-1970zz-   |
|      | 22 | 7   | 7   | 25   | 1.5  | 1.5 | 627      | R-2270zz    |           | RF-2270zz    |
| 26   | 9  | 9   | 29  | 2    | 2    | 637 | R-2670zz |             | RF-2670zz |              |

Tel: 886-3-3250202 Fax:886-3-3259933 Email: [jota@jota-bearing.com.tw](mailto:jota@jota-bearing.com.tw)

Add: 桃園市春日路 1434 巷 65 號 / No.65, Ln. 1434, Chunri Rd., Taoyuan City, Taoyuan County 330, Taiwan (R.O.C.)



久大軸承有限公司  
JOTA BEARING CO., LTD.

| 主要寸法  |      |        |      |        |       |          | 型號       |             | 凸緣型號     |            |
|-------|------|--------|------|--------|-------|----------|----------|-------------|----------|------------|
| d     | D    | W      | W1   | FD     | FW    | FW1      | JIS      | NMB         | OPEN     | Shielded   |
| 8     | 12   | 2.5    | 3.5  | 13.2   | 0.6   | -        | 678      | L-1280zz    | LF-1280  | -          |
|       | 12   | -      | 3.5  | 13.6   | -     | 0.8      | -        | -           | -        | LF-1280zz  |
|       | 14   | 3.5    | 4    | 15.6   | 0.8   | 0.8      | -        | L-1480zz    | LF-1480  | LF-1480zz  |
|       | 16   | 4      | 5    | 18.0   | 1.0   | -        | 688      | L-1680zz    | LF-1680  | LF-1680zz  |
|       | 16   | -      | 6    | -      | -     | -        | -        | L-1680zzw06 | -        | -          |
|       | 19   | 6      | 6    | 22.0   | 1.5   | 1.5      | 698      | R-1980zz    | RF-1980  | RF-1980zz  |
|       | 22   | 7      | 7    | 25     | 1.5   | 1.5      | 608      | R-2280zz    | RF-2280  | -          |
|       | 24   | 8      | 8    | -      | -     | -        | 628      | R-2480zz    | -        | -          |
|       | 28   | 9      | 9    | -      | -     | -        | 638      | R-2880zz    | -        | -          |
| 9     | 17   | 4      | 5    | 19.0   | 1.0   | 1.1      | 689      | L-1790zz    | LF-1790  | LF-1790zz  |
|       | 20   | 6      | 6    | 23.0   | 1.5   | 1.5      | 699      | L-2090zz    | LF-2090  | LF-2090zz  |
|       | 24   | 7      | 7    | 27     | 1.5   | 1.5      | 609      | R-2490zz    | -        | LF-2490zz  |
|       | 26   | 8      | 8    | -      | -     | -        | 629      | R-2690zz    | -        | -          |
| 10    | 15   | 3      | 4    | 16.5   | -     | 0.8      | SMT-1510 | A-1510zz    | -        | AF-1510zz  |
|       | 19   | 5      | 7    | 22     | -     | 1.5      | -        | L-1910zz    | -        | LF-1910zz  |
|       | 20   | 6      | 6    | -      | -     | -        | -        | R-2010zz    | -        | -          |
| 15    | 20   | 3.5    | -    | -      | -     | -        | SMT-2015 | -           | -        | -          |
|       | 21   | 3.5    | -    | -      | -     | -        | SMT-2115 | -           | -        | -          |
| 16    | 22   | 4      | -    | -      | -     | SMT-2216 | A-2216   | -           | -        |            |
| 18    | 24   | 4      | -    | -      | -     | SMT-2418 | A-2418   | -           | -        |            |
| 20    | 25   | 4      | -    | -      | -     | SMT-2520 | A-2520   | -           | -        |            |
| 1.016 | 1/8  | 1.1913 | -    | -      | -     | -        | RI-2     | -           | -        | -          |
| 1.397 | 3/16 | 5/64   | 7/64 | 5.944  | 0.584 | 0.787    | RI-3     | RI-3zz      | RIF-3    | RIF-3zz    |
| 5/64  | 1/4  | 3/32   | 3.57 | 7.518  | 0.584 | 0.787    | -        | RI-4zz      | RIF-4    | RIF-4zz    |
| 3/32  | 3/16 | 1/16   | 3/32 | 5.944  | 0.457 | 0.787    | RI-3332  | RI-3332zz   | RIF-3332 | RIF-3332zz |
| 3/32  | 5/16 | 2.78   | 3.57 | 9.119  | 0.584 | 0.787    | RI-5     | RI-5zz      | RIF-5    | RIF-5zz    |
| 1/8   | 1/4  | 3/32   | 7/64 | 7.518  | 0.584 | 0.787    | R-144    | RI-418zz    | RIF-418  | RIF-418zz  |
| 1/8   | 5/16 | 7/64   | 9/64 | 9.119  | 0.584 | 0.787    | R2-5     | RI-518zz    | RIF-518  | RIF-518zz  |
| 1/8   | 3/8  | 7/64   | 9/64 | 10.719 | 0.584 | 0.787    | R2-6     | RI-618zz    | RIF-618  | RIF-618zz  |
| 1/8   | 3/8  | 5/32   | 5/32 | 11.176 | 0.762 | 0.762    | R-2      | R-2zz       | RF-2     | RF-2ZZ     |
| 5/32  | 5/16 | 7/64   | 1/8  | 9.119  | 0.584 | 0.914    | R-155    | RI-5532zz   | RIF-5532 | RIF-5532zz |
| 3/16  | 5/16 | 7/64   | 1/8  | 9.119  | 0.584 | 0.914    | R-156    | RI-5632zz   | RIF-5632 | RIF-5632zz |
| 3/16  | 3/8  | 1/8    | 1/8  | 10.719 | 0.584 | 0.789    | R-166    | RI-6632zz   | RIF-6632 | RIF-6632zz |
| 3/16  | 1/2  | 5/32   | 5mm  | 14.351 | 1.067 | 1.067    | R-3      | R-3zz       | RF-3     | RF-3zz     |

|       |       |      |       |        |       |       |         |           |          |            |
|-------|-------|------|-------|--------|-------|-------|---------|-----------|----------|------------|
| 3/16  | 1/2   | 5mm  |       |        |       |       | RA-3    |           |          |            |
| 1/4   | 3/8   | 1/8  | 1/8   | 10.719 | 0.584 | 0.914 | R-168   | RI-614zz  | RIF-614  | RIF-614zz  |
| 1/4   | 1/2   | 1/8  | 3/16  | 13.894 | 0.584 | 1.143 | R-188   | RI-814zz  | RIF-814  | RIF-814zz  |
| 1/4   | 5/8   | 5mm  | 5mm   | 17.526 | 1.067 | 1.067 | R-4     | R-4zz     | RF-4     | RF-4zz     |
| 1/4   | 3/4   | 7/32 | 9/32  |        |       |       | R-4A    | RI-1214zz |          |            |
| 5/16  | 1/2   | 5/32 | 5/32  | 13.894 | 0.787 | 0.787 | R-1810  | RI-8516zz | RIF-8516 | RIF-8516zz |
| 3/8   | 7/8   | 7/32 | 9/32  | 24.613 |       | 1.575 | R-6     | R-6zz     |          | RF-6zz     |
| 1/2   | 1 1/8 | 1/4  | 5/16  |        |       |       | R-8     | R-8zz     |          |            |
| 5/8   | 1 3/8 | 9/32 | 11/32 |        |       |       | R-10    | R-10zz    |          |            |
| 3/4   | 1 5/8 | 5/16 | 7/16  |        |       |       | R-12    | R-12zz    |          |            |
| 7/8   | 1 7/8 | 3/8  | 1/2   |        |       |       | R-14    | R-14zz    |          |            |
| 1"    | 2"    | 3/8  | 1/2   |        |       |       | R-16    | R-16zz    |          |            |
| 1 1/8 | 2 1/8 | 3/8  | 1/2   |        |       |       | R-18    | R-18zz    |          |            |
| 1 1/4 | 2 1/4 | 3/8  | 1/2   |        |       |       | R-20    | R-20zz    |          |            |
| 1 3/8 | 2 1/2 | 7/16 | 9/16  |        |       |       | R-22    | R-22zz    |          |            |
| 1 1/2 | 2 5/8 | 7/16 | 9/16  |        |       |       | R-24    | R-24zz    |          |            |
| 1/8   | 3/8   | -    | 3/16  |        |       |       | F-2     | F-2zz     |          |            |
| 3/16  | 9/16  | -    | 1/4   |        |       |       | F-3     | F-3zz     |          |            |
| 1/4   | 5/8   | -    | 1/4   |        |       |       | F-4     | F-4zz     |          |            |
| 5/16  | 11/16 | -    | 1/4   |        |       |       | F-5     | F-5zz     |          |            |
| 3/8   | 5/8   | 5/32 | 5/32  |        |       |       | RI-1038 | RI-1038zz |          |            |
| 1/2   | 3/4   | 5/32 | 5/32  |        |       |       | RI-1212 | RI-1212zz |          |            |
| 5/8   | 7/8   | 5/32 | 5/32  |        |       |       | RI-1458 | RI-1458zz |          |            |
| 3/4   | 1"    | 5/32 | 5/32  |        |       |       | RI-1634 | RI-1634zz |          |            |

Tel: 886-3-3250202 Fax:886-3-3259933 Email: [jota@jota-bearing.com.tw](mailto:jota@jota-bearing.com.tw)

Add: 桃園市春日路 1434 巷 65 號 / No.65, Ln. 1434, Chunri Rd., Taoyuan City, Taoyuan County 330, Taiwan (R.O.C.)